


TECHNICAL INFORMATION

STEEL WIRE ROPE 7 WIRES (1+6)

made with **HOT DIP STEEL WIRE NORMAL GALVANIZATION**

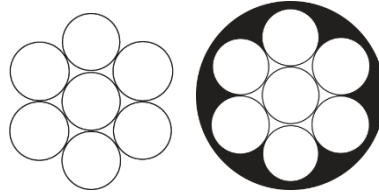


Rope ø mm	Single wire ø mm	Zinc coating 5%* gr/m2	Single wire Tensile Strength* Kg/mm2	Rope Tensile Strength* Kg	Rope weight* Kg/m
	1.00	90/100	150/160	815	0.045
Ø 4	1.30	130/140	150/160	1350	0.076
Ø 5	1.65	160/170	150/160	2000	0.123
Ø 6	2.00	190/200	140/150	2800	0.180
Ø 7	2.30	210/230	140/150	3750	0.240
Ø 8	2.65	250/260	140/150	5000	0.320

* approximate values

STEEL WIRE ROPE 7 WIRES (1+6)

made with **HOT DIP STEEL WIRE HIGH GALVANIZATION**

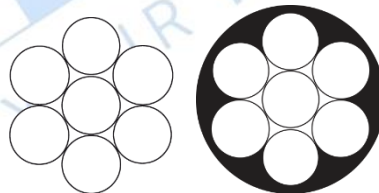

Rope ø mm	Single wire ø mm	Zinc coating 7%* gr/m2	Single wire Tensile Strength* Kg/mm2	Rope Tensile Strength* Kg	Rope weight* Kg/m
Ø 3	1.00	140/160	150/160	1050	0.045
Ø 4	1.30	190/220	150/160	1350	0.076
Ø 5	1.65	250/260	150/160	2000	0.123
Ø 6	2.00	290/300	140/150	2800	0.180
Ø 8	2.65	350/360	140/150	5000	0.320


* approximate values

PACKING: on FASTENED ROLL or WOODEN REEL, coil length/weight upon customer request.
In case of order, please specify required coil length or weight.

TECHNICAL INFORMATION

STEEL WIRE ROPE 19 WIRES (1+6+12)

made with **HOT DIP STEEL WIRE NORMAL GALVANIZATION**

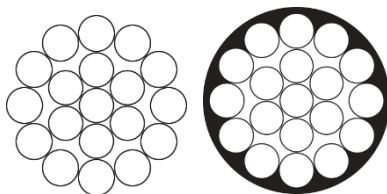


Rope ø mm	Single wire ø mm	Zinc coating 5%* gr/m2	Single wire Tensile Strength* Kg/mm2	Rope Tensile Strength* Kg	Rope weight* Kg/m
Ø 3	0.60	60/70	150/160	800	0.044
Ø 4	0.80	80/90	150/160	1400	0.08
Ø 5	1.00	90/100	150/160	2000	0.124
Ø 6	1.20	100/120	150/160	3000	0.17
Ø 7	1.40	130/150	150/160	4000	0.24
Ø 8	1.60	160/170	150/160	5000	0.31

* approximate values

STEEL WIRE ROPE 19 WIRES (1+6+12)

made with **HOT DIP STEEL WIRE HIGH GALVANIZATION**

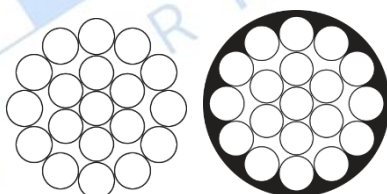

Rope ø mm	Single wire ø mm	Zinc coating 7%* gr/m2	Single wire Tensile Strength* Kg/mm2	Rope Tensile Strength* Kg	Rope weight* Kg/m
Ø 3	0.60	80/90	150/160	800	0.044
Ø 4	0.80	110/120	150/160	1400	0.08
Ø 5	1.00	160/170	150/160	2000	0.124
Ø 6	1.20	170/180	150/160	3000	0.17
Ø 8	1.60	230/260	150/160	5000	0.31


* approximate values

PACKING: on FASTENED ROLL or WOODEN REEL, coil length/weight on customer request.
In case of order, please specify required coil length or weight.

TECHNICAL INFORMATION

STEEL WIRE ROPE 49 WIRES (7x7)

made with **HOT DIP STEEL WIRE NORMAL GALVANIZATION**




Rope ø	Single wire ø	Zinc coating 5%*	Single wire Tensile Strength*	Rope Tensile Strength*	Rope weight*
mm	mm	gr/m2	Kg/mm2	Kg	Kg/m
Ø 4	0.43	40/50	160/180	1200	0.065
Ø 5	0.55	50/60	160/180	1800	0.100
Ø 6	0.65	60/70	160/180	2500	0.145
Ø 7	0.77	70/80	160/180	3500	0.195
Ø 8	0.85	80/90	160/180	4500	0.23

* approximate values

STEEL WIRE ROPE 49 WIRES (7x7)

made with **HOT DIP STEEL WIRE HIGH GALVANIZATION**



Rope ø	Single wire ø	Zinc coating 7%*	Single wire Tensile Strength*	Rope Tensile Strength*	Rope weight*
mm	mm	gr/m2	Kg/mm2	Kg	Kg/m
Ø 8	0.85	110/120	160/180	4500	0.23

* approximate values

PACKING: on FASTENED ROLL or WOODEN REEL, coil length/weight on customer's request.
In case of order, please specify required coil length or weight.